



MULTI-USE FILLER

Product designed for the securing tiles, repairing of façades, exterior walls and renovation of light wells.





B-13



SURFACES

Plaster, plaster of Paris, cement, concrete, brick partitions, stone, plastic paint, tiles and low absorption surfaces.

Surfaces must be sound, dry, cohesive, absorbent, well adhered, clean and free of dust.

CHARACTERISTICS

- Fast setting.
- Quick drying
- Applicable in thin and thick layers.
- Easy to apply.
- High adherence.
- Hard finish.
- Storage: 6 months in its original packaging and protected from moisture.

IDEAL FOR

Plaster filling and façade renovation.

Mixing water ratio

Use time

20 - 40 min

BAIXENS

baixens.com TESTING THE DIFFERENCE

Covering of non-structural cracks and cavities in façades.


BAIXENS ESPAÑA

T: 961 750 834

F.: 961.752.471

POL. IND. MONCARRA, S/N 46230 ALGINET (VALENCIA)

Plastering and renovation of bathrooms, kitchens and even on old tile surfaces.

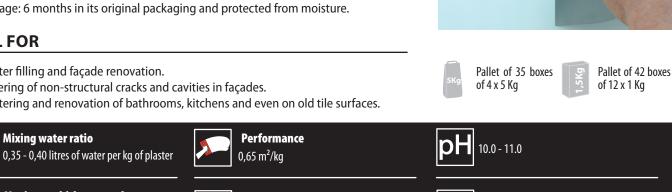



Maximum thickness per layer 10 mm for plastering Unlimited for filling







BAIXENS FRANCE 14, RUE DU PONT NEUF 75001 PARIS (FRANCE) T: 0.800.90.14.37 F.: 0.800.90.20.52

BAIXENS ITALIA / BULOVA VIA PIETRO NENNI, 36 46019 CICOGNARA - MANTOVA (ITALY) T.: 0375/88181/790016 F.: 0375/88831 www.bulova-pennelli.com

BAIXENS PORTUGAL / ARGATINTAS AVENIDA PORTAS DO MINHO, Nº 711 4760 - 706 RIBEIRÃO, V.N. FAMALIÇÃO T.: 252 910 030 | www.argatintas.pt

B13NF125A20

commercial sheet that cancels and replaces any previous version. 12/2020. The technical data have been obtained on standardised surfaces and under laboratory conditions, so they can vary according to the conditions of use. These technical data do not imply any guarantee on our part in the event of improper use of our product.



CLASSIFICATION ACCORDING TO STANDARD EN16566

G₃S₃V₃W₁A₀C₀R₀



Fire classification

Maximun granulometry

A2 - s1 - d0

300 microns