

B-19

BRICO®

## STOP NAILS

Super adherent product suitable for gluing wood, ceramics, gypsum and plaster.



### INFORMATION ON DIRECTIVE 2004/42/CE

CATEGORY I1, HIGH PERFORMANCE WATER-BASED COATINGS OF ONE COMPONENT

Limit: 140 g/l COV (2007); 140 g/l COV (2010)  
This product contains 4,94 g/l COV max.

### USES

Wood, ceramics, gypsum, plaster, cement, concrete, EPS moulds, door frames, baseboards, pre-fab panels, tiles and all types of absorbent substrates.


Substrates must be healthy, dry, cohesive, absorbent, well adhered, clean and free of dust.

### FEATURES

- Solid and permanent fastening.
- Excellent adherence and elasticity.
- Storage: 12 months inside its original packing and kept free from damp and humidity.

### IDEAL FOR

- Avoiding the use of nails and with it the drilling of walls.

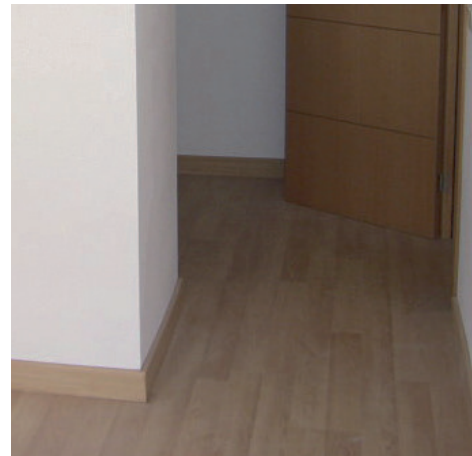

Pallet of 120 cases  
of 12 x 200 g



#### Preparation

Ready to use



#### Performance

0,65 m<sup>2</sup>/kg



7.0 - 8.0



#### Maximum thickness per layer

2 mm.



#### Adherence

> 13 Kg/cm<sup>2</sup> on cement



#### Fire classification

E - d0



#### Useful life

Unlimited



#### Drying time in 1mm thickness

4 - 5 hrs.



#### Maximum granulometry

200 microns