


B-27

BRICO®

SEALING PASTE FOR WOOD

Product suitable for sealing and covering pores in wood before painting.



INFORMATION ON DIRECTIVE 2004/42/CE

CATEGORY i1, HIGH PERFORMANCE WATER-BASED COATINGS OF ONE COMPONENT

Limit: 140 g/l COV (2007); 140 g/l COV (2010)
This product contains 1,25 g/l COV max.


USES

Natural wood, decking, parquet, wooden frames and furniture.

Substrates must be healthy, dry, cohesive, absorbent, well adhered, clean and free of dust.

FEATURES

- Contains natural micronized fibres.
- Easy to straighten.
- Easy to sand.
- Optimum workability.
- Strong adhesion.
- Superficial film of extreme hardness
- Storage: 12 months inside its original packing and kept free from damp and humidity.

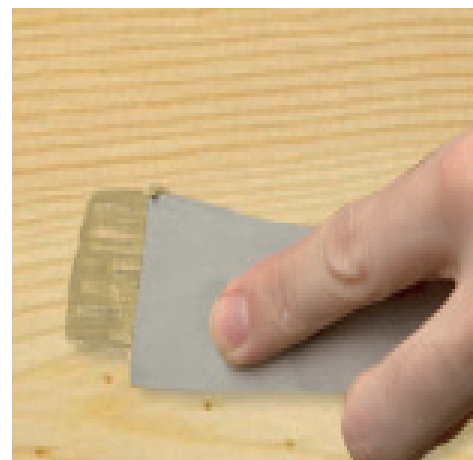

IDEAL FOR

- Smoothing and sealing wooden surfaces.



Pallet of 120 cases
of 12 x 200 g



Preparation

Ready to use



Performance

0,625 m²/Kg



8.5 - 9.5



Maximum thickness per layer

1 mm.



Adherence

> 11 Kg/cm² on concrete



Fire classification

A2 - s1 - d0



Useful life

Unlimited



Drying time in 1mm thickness

4 - 5 hrs.



Maximum granulometry

100 microns