


B-28

BRICO®

FLEXIBLE PUTTY

Product suitable for gluing wood, ceramic, gypsum, plaster and door frames



INFORMATION ON DIRECTIVE 2004/42/CE
CATEGORY I1, HIGH PERFORMANCE WATER-BASED COATINGS OF ONE COMPONENT

Limit: 140 g/l COV (2007); 140 g/l COV (2010)
This product contains 4,94 g/l COV max.

USES

Wood, ceramics, gypsum, plaster, cement, concrete, door moulds or frames, skirting, pre-fab panels, tiles and any type of absorbent substrate.


Substrates must be healthy, dry, cohesive, absorbent, well adhered, clean and free of dust.

FEATURES

- Solid and permanent fastening.
- Excellent adhesion.
- Great elasticity
- Storage: 12 months inside its original packing and kept free from damp and humidity.

IDEAL FOR

- Gluing furniture, parquet and pieces of wood

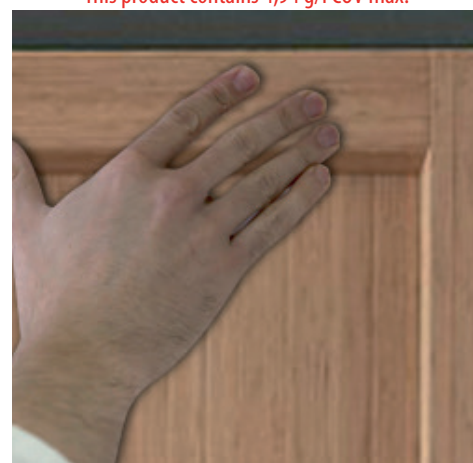

Pallet of 120 cases
of 12 x 200 g



Preparation

Ready to use



Performance

0,14 m²/Kg



7.0 - 8.0



Maximum thickness per layer

2 mm.



Adherence

> 13 Kg/cm² on cement



Fire classification

E - d0



Useful life

Unlimited



Drying time in 1mm thickness

4 - 5 hrs.



Maximum granulometry

200 microns