

B-34



OUTDOOR PLASTIC PASTE

Product designed for repairing outdoor cracks and stubborn cracks.



* information représentative des émissions dans l'air intérieur des substances volatiles présentant un risque de toxicité par inhalation, sur une échelle de classe allant de C (fortes émissions) à A+ (très faibles émissions).

EXTERIOR



INFORMATION ABOUT DIRECTIVE 2004/42/CE

CATEGORY 11, HIGH PERFORMANCE COMPONENT COATINGS, WATERBASED

Limit: 140 g/l VOC (2007); 140 g/l VOC (2010)

This product contains max: 1,24 g/l VOC

SURFACES


Cement, brick, stone, wood, aerated concrete, semi-absorbent surfaces.
Surfaces must be sound, dry, cohesive, absorbent, well adhered, clean and free of dust.

CHARACTERISTICS

- White.
- Applicable in thick layers.
- Excellent thixotropy.
- Paintable once completely dry.
- Flexible.
- High adherence.
- Storage: 12 months in its original packaging and protected from moisture.

IDEAL FOR

- Filling outdoor cracks.
- Sealing vertical static cracks.

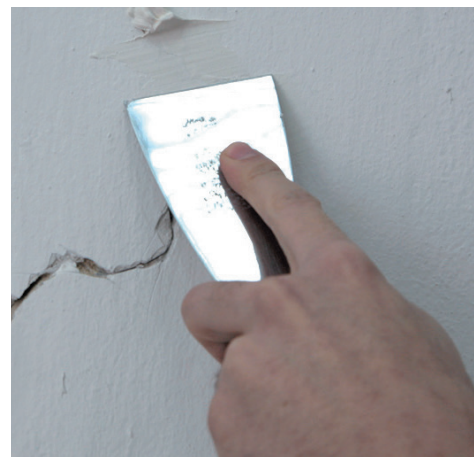

Pallet of 120 boxes of 12 x 310 ml



Preparation
Ready to use



Performance in a 5mm thick layer and 1cm in width
65 - 75 g/lineal metre



7.0 - 9.0



Maximum thickness per layer
Unlimited for filling



Adherence
Initial: > 13 Kg/cm²
After thermal aging: > 29 Kg/cm²



Density
1,51 ± 0,07



Use time
No limits



Dry to the touch: 60' - 90'
Deep drying: 24 H



Maximum granulometry
< 50 microns



BAIXENS ESPAÑA
POL. IND. MONCARRA, S/N
46230 ALGINET (VALENCIA)
T.: 961.750.834
F.: 961.752.471

BAIXENS FRANCE
14, RUE DU PONT NEUF
75001 PARIS (FRANCE)
T.: 0.800.90.14.37
F.: 0.800.90.20.52

BAIXENS ITALIA / BULOVA
VIA PIETRO NENNI, 36
46019 CICOGNARA - MANTOVA (ITALY)
T.: 0375/88181/790016 F.: 0375/88831
www.bulovala-pennelli.com

BAIXENS PORTUGAL / ARGATINTAS
AVENIDA PORTAS DO MINHO, Nº 711
4760 - 706 RIBEIRÃO,
V.N. FAMILICÃO
T.: 252 910 030 | www.argatintas.pt

TESTING THE DIFFERENCE

B34NF2579A20