


E-01

Enlucite[®]**STANDARD**

Suitable for concealing and smoothing standard gypsum and/or cement substrates

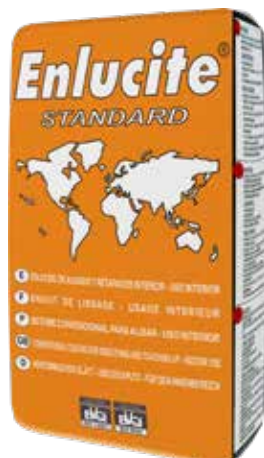

INTERIOR

**USES**

Gypsum, plaster, cement, non-elastic plastic paint.

Substrates must be healthy, dry, cohesive, absorbent, well adhered, clean and free of dust.

FEATURES & USES

- Slow setting
- Easy to apply, smooth and sand.
- Thin layer applicable.
- Fills in flaws in wood.
- Fills in pores in wood.
- Smooths walls with flaws (scratches, lines, bumps...).
- Storage: 12 months inside its original packing and kept free from damp and humidity.

**RECOAT**

BY ALL TYPES OF NON-ELASTIC PAINTS ONCE COMPLETELY DRY

CODE (EN 16566):

G3S2V3W2A0C0R0Pallet of 66 sacks
of 15 kg.Pallet of 35 cases
of 4 x 5 kg.Pallet of 36 cases
of 20 x 1 kg.**Water for mixing**0,38 – 0,43 litres of water per kg of
plaster**Performance in 1mm layer**1.65 - 1.80 Kg/m²

6.0 - 7.0

**Maximum thickness per layer**

1 mm

**Adhesion**> 7 Kg/cm² on cement and paint**Fire classification**

A1

**Useful life**

7 - 8 H

**Drying in 1mm thickness**Plaster: 3 – 4 hrs.
Paint & concrete: 4 – 6 hrs.**Maximum granulometry**

300 microns