


E-02

Enlucite®

SMOOTHERS

Plaster for interior smoothing of substrates

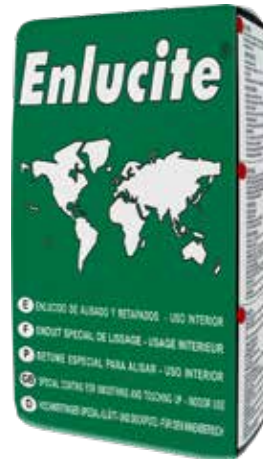

INTERIOR



RECOAT

BY ALL TYPES OF NON-ELASTIC PAINTS ONCE COMPLETELY DRY

CODE (EN 16566):

G3S2V3W2A0C0R0

USES

Gypsum, plaster, cement, pre-fabs, non-elastic plastic paint.

Substrates must be healthy, dry, cohesive, absorbent, well adhered, clean and free of dust.

FEATURES & USES

- Slow setting
- Easy to apply, smooth and sand.
- Does not tear away when worked with iron.
- Thin layer applicable.
- Extra fine finish of exceptional adhesion to the substrate.
- Fills in small flaws in wood.
- Smooths walls with small flaws.
- Suitable for high quality smoothing of big surfaces.
- Storage: 12 months inside its original packing and kept free from damp and humidity.



Pallet of 66 sacks
of 15 kg.



Pallet of 35 cases
of 4 x 5 kg.



Water for mixing

0,40 – 0,45 litres of water per kg of plaster



Performance in 1mm layer

1.65 - 1.80 Kg/m²



6.0 - 7.0



Maximum thickness per layer

1 mm



Adhesion

> 6 Kg/cm² on cement and paint



Fire classification

A1



Useful life

8 Hrs. Approx.



Drying in 1mm thickness

Plaster: 3 – 4 hrs.
Concrete: 4 – 5 hrs.
Paint: 5 – 6 hrs.



Maximum granulometry

200 microns