


E-06

Enlucite®

## RENOVATION N

Suitable for covering laminated stipple paint and renovating rugged, pitted or embossed surfaces.

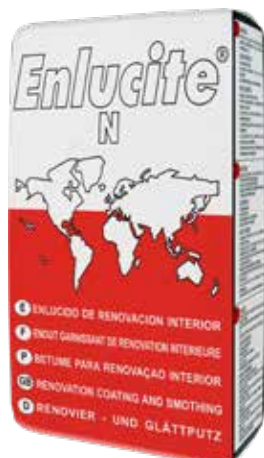

INTERIOR



### RECOAT

BY ALL TYPES OF NON-ELASTIC PAINTS ONCE COMPLETELY DRY

CÓDIGO (EN 16566):

**G3S2V3W2A0C0R0**

### USES

Gypsum, plaster, gypsum plasterboards, cement, laminated stipple paint and non-elastic plastic paint.

Substrates must be healthy, dry, cohesive, absorbent, well adhered, clean and free of dust.

### FEATURES & USES

- Medium setting.
- Easy to apply, smooth and sand.
- Possibility of going over before drying.
- Excellent covering power.
- Low superficial tension product.
- Contains surfactants and anti-cracking agents.
- Applicable in thick layer to cover imperfections.
- Smoothing stipple painted walls.
- Renovating painted walls.
- Levelling vertical substrates.
- Storage: 12 months inside its original packing and kept free from damp and humidity.



Pallet of 66 sacks  
of 15 kg.



Pallet of 35 cases  
of 4 x 5 kg.



#### Water for mixing

0,42 – 0,45 litres of water per kg of plaster



#### Performance in 1mm layer

1.45 - 1.60 Kg/m<sup>2</sup>



6.5 - 7.5



#### Maximum thickness per layer

7 mm



#### Adhesion

> 5 Kg/cm<sup>2</sup> on cement & paint.



#### Fire classification

A1



#### Useful life

5 - 7 Hrs



#### Drying in 1mm thickness

Plaster: 3 - 4 hrs.  
Concrete & paint: 5- 6 hrs.



#### Maximum granulometry

300 micras