


E-08

Enlucite®

EXTERIORS

Suitable for smoothing cement substrates

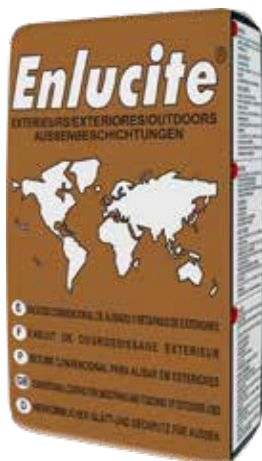

USES

Cement, concrete, brick walls, stone, suitable for applying on painted bases. Substrates must be healthy, dry, cohesive, absorbent, well adhered, clean and free of dust.

FEATURES & USES

- Medium setting.
- Easy to apply.
- Applicable in thin and thick layer.
- Ideal for concealing fissures and micro-fissures.
- Conceals non-movement cracks and non-structural character.
- Smoothing and plastering of exterior walls.
- Storage: 12 months inside its original packing and kept free from damp and humidity.
- The direct use of paint containing alkali resistant pigments can produce discolouration. In order to avoid this cosmetic damage, we recommend prior to painting, the use of dissolvent or water-based penetrating fixer consolidator or an acrylic absorption regulated primer. For more information on precautions to bear in mind before applying paints on cement or exterior substrates please consult our information brochure.



RECOAT

BY ALL TYPES OF NON-ELASTIC PAINTS ONCE COMPLETELY DRY

CODE (EN 16566):

G3S2V2W2A0C0R0



Pallet of 66 sacks of 15 kg.



Pallet of 35 cases of 4 x 5 kg.



Pallet of 36 cases of 20 x 1 kg.



Water for mixing

0,35 – 0,40 litres of water per kg of plaster



Performance in 1mm layer

1.50 - 1.65 Kg/m²



12.0 - 13.0



Maximum thickness per layer

10 mm



Adhesion

> 7 Kg/cm² on cement.



Fire classification

A1 y A1_{FL}



Useful life

2 Hr. 30' – 3 Hrs. 30'



Drying in 1mm thickness

Concrete: 3 - 4 H



Maximum granulometry

300 micras