


E-09

Enlucite®

EXTERIOR REPAIRS

Suitable for repairing all sorts of masonry flaws

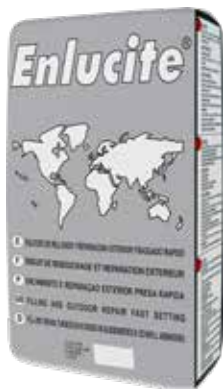

RECOAT

BY ALL TYPES OF NON-ELASTIC PAINTS ONCE COMPLETELY DRY

CODE (EN 16566):

G3S3V3W2A0C0R0

EXTERIOR



USES

Cement, concrete, brick walls, stone, semi-absorbent painted bases.

Substrates must be healthy, dry, cohesive, absorbent, well adhered, clean and free of dust.

FEATURES & USES

- Standard setting.
- Easy to apply.
- Applicable in thin and thick layer.
- Strong adhesion.
- Fibered and water-proof.
- Great loading power in each coat.
- Used for covering gaps and cavities on absorbent bases.
- Due to its strong adhesion can be used for securing structures on façades.
- Storage: 12 months inside its original packing and kept free from damp and humidity.
- The direct use of paint containing alkali resistant pigments can produce discolouration. In order to avoid this cosmetic damage, we recommend prior to painting, the use of dissolvent or water-based penetrating fixer consolidator or an acrylic absorption regulated primer. For more information on precautions to bear in mind before applying paints on cement or exterior substrates please consult our information brochure.



Pallet of 66 sacks of 15 kg.



Pallet of 35 cases of 4 x 5 kg.



Pallet of 36 cases of 20 x 1 kg.



Water for mixing

0,28 – 0,30 litres of water per kg of plaster



Performance in 1mm layer

1,70 – 1,80 Kg/m²



12.5 - 13.5



Maximum thickness per layer

10mm. for plastering
Unlimited for filling in.



Adhesion

> 11 Kg/cm² on cement.



Fire classification

A1



Useful life

1 Hr. 30' – 3 Hrs.



Drying in 1mm thickness

Concrete: 3- 4 hrs.



Maximum granulometry

600 microns