


E-12

Enlucite®

PASTE FINISHES PASTA

Suitable for full thin layer plastering.

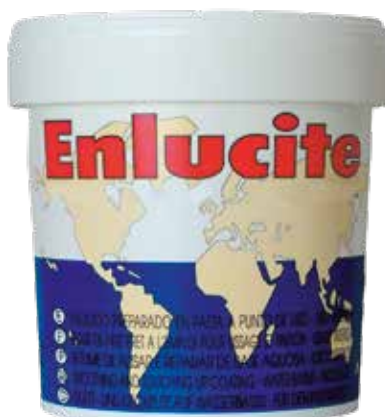

INFORMATION ON DIRECTIVE 2004/42/CE
CATEGORY II, HIGH PERFORMANCE ONE COMPONENT
WATER-BASED COATINGS

LIMIT: 140G/L COV (2007); 140g/l COV(2010)
This product contains 2,15g/l COV max.

RECOAT

BY ALL TYPES OF NON-ELASTIC PAINTS
ONCE COMPLETELY DRY

CODE (EN 16566):

G3S1V2W2A0C0R0

INTERIOR



USES

Gypsum, plaster, cement, synthetic paint.

Substrates must be healthy, dry, cohesive, absorbent, well adhered, clean and free of dust.

FEATURES & USES


- Excellent workability.
- Easy to smooth and sand.
- Non-drip.
- Does not mount or roll on the joints/splice.
- Great covering power.
- Thin layer applicable.
- Great finesse finishes.
- Does not tear away when worked with iron.
- Storage: 12 months inside its original packing and kept free from damp and humidity.




25Kg Pallet of 33
buckets of 25 kg.


5Kg Pallet of 24 cases
of 4 x 5 kg.

1Kg Pallet of 24 cases
of 18 x 1 kg.


 **Preparation**
Ready to use.
Clean tools with water.

 **Performance in 1mm layer**
1.50 - 1.60 Kg/m²/mm


 **pH** 7.0 - 8.0

 **Maximum thickness per layer**
1 mm

 **Adhesion**
> 12 Kg/cm² on cement & paint.

 **Fire classification**
A2 - s1 - d0

 **Useful life**
Unlimited

 **Drying in 1mm thickness**
Cement: 8 - 10 hrs.
Paint: 10 hrs. approx.

 **Maximum granulometry**
100 micras