

# RX-409


**Rualaix®**

## LEGNOSTUC

Ready-to-use fibre-reinforced paste designed for smoothing, filling and sealing wood.



\* information representative des émissions dans l'air intérieur des substances volatiles présentant un risque de toxicité par inhalation, sur une échelle de classe allant de C (fortes émissions) à A+ (très faibles émissions).



**INFORMATION ABOUT DIRECTIVE 2004/42/CE**  
CATEGORY i1, HIGH PERFORMANCE COMPONENT COATINGS,  
WATERBASED

Limit: 140 g/l VOC (2007); 140 g/l VOC (2010)  
This product contains max. <140 g/l VOC

### COVERING

FOR ALL TYPES OF CONVENTIONAL PAINT  
AFTER COMPLETE DRYING

**CLASSIFICATION ACCORDING TO  
STANDARD EN 16566**

**G3S2V2W2A0C0R0**

## SURFACES

Natural wood, floorboards, parquet, wooden door and window frames, furniture.  
Surfaces must be sound, dry, cohesive, absorbent, well adhered, clean and free of dust.

## CHARACTERISTICS

- Excellent workability
- Contains micronised fibres.
- Easy to smooth.
- Easy to sand.
- Excellent filling capacity.
- Good adherence.
- Extremely hard surface film.
- 14 colours in the range.

## IDEAL FOR

- Smoothing, filling and sealing wood surfaces.

## ON-SITE APPLICATION

### SURFACE PREPARATION

The surface must be sound, clean and free of any trace of saltpetre, fungi, microorganisms, grease, release oils and, in general, any type of material that could make it difficult for the product to adhere to the surface.



# RX-409

**Rualaix®**

## LEGNOSTUC

### ON-SITE APPLICATION

#### CLEANING

When the supports present traces of fungi, algae or other types of microorganisms, we will proceed with the curative treatment, first of all, with a quick mold cleaner. This will be applied to the surface to be treated and after 5 -10 minutes of action, the support will be cleaned with the help of a pressurized water machine or with a hard bristle brush. Next, and once the support is completely dry, a broad-spectrum biocide cleaner will be applied until the support is completely impregnated. This treatment is called preventive, it is very effective and serves to prevent the future appearance of microorganisms.

Any grease or oil must be completely eliminated to allow the product to adhere correctly to the surface.

#### DIRECTIONS FOR USE

Ready-to-use material. Do not dilute.

For cavity filling, we recommend using a medium sized spatula that allows for good pressure inside the cavity. Where possible, ensure that the width of the spatula is slightly greater than the size of the cavity.

Finally, after drying, if desired, it can be lacquered or varnished.

### TECHNICAL CHARACTERISTICS

Density	1.64 ± 0.07
Maximum granulometry	200 µm
pH	8.0 - 9.0
Shore C hardness	80
Maximum thickness per layer	10 mm
Initial adherence to concrete	≥ 9 Kg/cm2
Tool cleaning	With water

Drying time in 1 mm layer on painted surface (*)	3 - 4 H
Fire classification	A2 - s1 - d0

(\*) Depends on the environmental conditions, the nature of the surface and the thickness of application.

INFORMATION ON DIRECTIVE 2004/42/EC - Category i1	
VOC LIMIT	VOC CONTENT
140 g/l (2007) - 140 g/l (2010)	< 140 g/l max.

PERFORMANCE	
kilograms of paste applied per m2 in 1 mm thickness	1.45 - 1.65

# RX-409

Rualaix®

## LEGNOSTUC

### INFORMATION OF INTEREST

The Rualaix range manufacturing process is controlled in batches, which allows traceability of any incident. The quality system used includes each article's design and production controls, both in terms of the raw materials used, guaranteeing uniform manufacturing, and the final item obtained. The use of ecotechnologies in our facilities' manufacturing processes allows for efficient work, without damaging the environment that surrounds us.

- Non-flammable product.
- Avoid the product coming into contact with skin and eyes.
- Smoking, eating and drinking must be prohibited in the application area.
- Comply with legislation on health and safety at work.
- Keep the product in a dry place, in original containers that are kept properly closed.
- Store the containers between 5°C and 35°C.
- Recommended storage time: 12 months from the date of manufacture in its original packaging and protected from moisture.

For further information on protective measures and first aid, please refer to the product's Safety Data Sheet.

### COMMENTS

- For appropriate use and correct application of the product, it is essential to first read the technical data sheet.
- The data provided in this data sheet are for guidance only and should not be considered binding. The data has been obtained in normal laboratory conditions and on standardised surfaces, and can vary depending on the conditions in which they are applied (absorption of the surface, applied thickness, temperature, environmental humidity, etc.). The intervals displayed have been shaped by measurement history. Slight deviations from the ranges presented in this technical sheet, whether higher or lower, will be accepted according to internal technical criteria and will not result in a loss of quality or affect the performance of the final product, due, among other factors, to variations in measurement conditions and the uncertainty associated with the instruments used.
- The working conditions of the users are beyond our control.
- The product must not be used for purposes other than those specified. It is recommended that the recommendations for use be strictly followed.
- Do not exceed the maximum recommended application thickness per coat.
- It is essential that the status of the surfaces be assessed prior to each application.
- Do not apply on non-absorbent or extremely crystalline surfaces.
- Do not mix with any material, as it will not retain its technical characteristics.
- We do not recommend applying the product on aged, badly adhered paints.
- Application temperature: from 5°C to 35°C.
- Maximum relative humidity: 85%.

# RX-409

**Rualaix®**


## LEGNOSTUC

### COMMENTS

- The technical department of **ESTABLECIMIENTOS BAIXENS** states that the designs of recently launched new products are considered to be in an experimental phase until an annual history can be constituted. From then on, the newly designed product is considered to be fully consolidated in the market. In the meantime, **BAIXENS** reserves the right to adapt its variable specifications or working ranges according to technical criteria. The data subject to modification will be identified with an asterisk for easy identification. These may be recently created products and/or products in an experimental phase or improvements in our various ranges due to market needs and/or demands.
- We place a technical-commercial team at your disposal that will advise you on any doubts or queries.

### PACKAGING

FORMAT	1 kg	200 g	500 g	250 g	310 ml
UNIT/BOX	12	8	4	18	12
PALLETS	44 BOXES	96 BOXES	96 BOXES	64 BOXES	120 BOXES

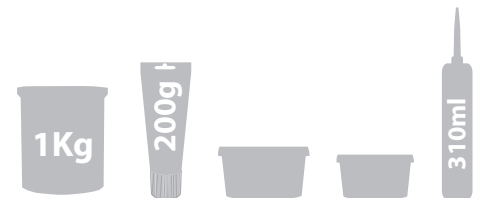

Internal code	RX409NF2204A20
Internal code	RX409TNF2181A20



**BAIXENS**  
baixens.com

*Testing the difference*

**BAIXENS ESPAÑA / PORTUGAL**  
POL. IND. MONCARRA, S/N  
46230 ALGINET - VALENCIA (ESPAÑA)  
T.: 961.750.834  
F.: 961.752.471

**BAIXENS FRANCE**  
14, RUE DU PONT NEUF  
75001 PARIS (FRANCE)  
T.: 0.800.90.14.37  
F.: 0.800.90.20.52

**BAIXENS ITALIA / BULOVA**  
VIA PIETRO NENNI, 36  
46019 CIGOGNARA - MANTOVA (ITALY)  
T.: 0375/88181/790016 F.: 0375/88831  
www.bulova-pennelli.com