

RX-521

Preparation of surfaces

CLEAN CEM

Energetic solution for the removal of cement and mortar residues on building surfaces and floors.



* information représentative des émissions dans l'air intérieur des substances volatiles présentant un risque de toxicité par inhalation, sur une échelle de classe allant de C (fortes émissions) à A+ (très faibles émissions).



INFORMATION ON DIRECTIVE 2004/42/CE

CATEGORY A, PREPARATION AND CLEANING (PRE-CLEANING PRODUCT)

Limit: 200 g/l VOC (2007)

This product contains < 200 g/l VOC max.

SURFACES

Application on usual surfaces used in construction (cement, concrete, brick, stone, ...). It can be applied on metallic surfaces that do not contain zinc or aluminium.

CHARACTERISTICS

- Scented.
- Includes corrosion inhibitor.
- Good cleaning capability.
- Easy application and quick cleaning.
- With non-ionic surfactants.
- Easy disposal of excess product.


IDEAL FOR

- Easy removal of all concrete and cement-based residues.
- Removal of old joints between tiles.
- Removal of cement stains without altering the surface.
- Cleaning of iron oxide incrustations.

ON-SITE APPLICATION

SURFACE PREPARATION

The surface must be sound, clean, dry, strong, well adhered, consistent and free of dust.

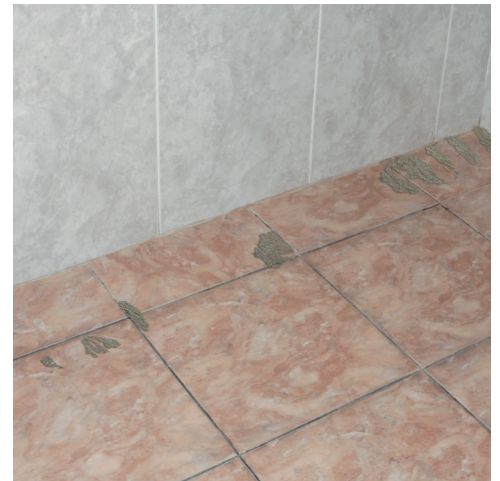

RX-521

Preparation of surfaces

CLEAN CEM

ON-SITE APPLICATION

DIRECTIONS FOR USE

A ready-to-use product. Do not dilute.

May be applied via a brush, roller, airless paint gun or an airbrush.

Corrosive products. Use appropriate personal protective equipment: gloves, safety goggles and face mask. Use in well ventilated areas.

Apply the product abundantly on the surface until it is saturated.

Leave to act for several seconds and then rub with a stiff bristled brush (not metallic) in a continuous circular motion until all cement stains are removed. If the base coat is not excessively dirty, it can be used diluted. In this case, dilution to 20% with water is recommended. Depending on the desired cleaning effectiveness, the dilution can vary from 5% to 20%, for superficial dirt cleaning, to the use of the material without dilution for the removal of more difficult cement stains.

Rinse with plenty of water in order to neutralize and remove any remaining active material that may alter the subsequent layers.

TECHNICAL CHARACTERISTICS

Density	1,095 ± 0.07 g/ml
pH	Approx. 1,25
Cleaning of tools	With water

INFORMATION ON DIRECTIVE 2004/42/CE – CATEGORY A

LIMIT COV	CONTENT COV
200 g/l (2007)	< 200 g/l maximum

PERFORMANCE

litres applied per m ²	0,250 - 0,350
-----------------------------------	---------------

INFORMATION OF INTEREST

The manufacturing process of our cleaners is controlled by batch, which allows traceability of any incident. The quality system used includes each article's design and production controls, both in terms of the raw materials used, guaranteeing uniform manufacturing, and the final item obtained. The use of ecotechnologies in our facilities' manufacturing processes allows for efficient work, without damaging the environment that surrounds us.

- Non-flammable product. Corrosive.
- Avoid the product coming into contact with skin and eyes.
- Smoking, eating and drinking must be prohibited in the application area.
- Comply with legislation on health and safety at work.
- Keep the product in a dry place, in original containers that are kept properly closed.
- Store the containers between 5°C and 35°C.
- Recommended storage time: 12 months from the date of manufacture in its original packaging and protected from moisture.

For further information on protective measures and first aid, please refer to the product's Safety Data Sheet.

RX-521

Preparation of surfaces

CLEAN CEM

OBSERVATIONS

- For appropriate use and correct application of the product, it is essential to first read the technical data sheet.
- The data provided in this data sheet are for guidance only and should not be considered binding. The data has been obtained in normal laboratory conditions and on standardised surfaces, and can vary depending on the conditions in which the product is applied (surface absorption, applied thickness, temperature, environmental humidity, etc.). The ranges shown are based on logs of measurements. Slight deviations from the ranges presented in this technical sheet, whether higher or lower, will be accepted according to internal technical criteria and will not imply a loss of quality or affect the performance of the final product, due to (among other factors) variations in measurement conditions and any uncertainty associated with the instruments used.
- The working conditions of users are beyond our control.
- The product must not be used for purposes other than those specified. It is recommended that the instructions for use be strictly followed.
- It is essential that the state of the bases be assessed prior to each application.
- Do not mix with any material, as it will not retain its technical characteristics.
- Application temperature: from 5°C to 35°C.
- Do not apply on surfaces containing zinc or aluminium. Low corrosive effect on steel, copper, brass and bronze metal surfaces.
- The technical department of **ESTABLECIMIENTOS BAIXENS** hereby informs you that the designs of recently launched new products are considered to be in an experimental phase until an annual history can be constituted. From then on, the newly designed product is considered to be fully consolidated in the market. In the meantime, **BAIXENS** reserves the right to adapt its variable specifications or working ranges according to technical criteria. Any details subject to modification will be identified with an asterisk for easy identification; these may be recently created products and/or products in an experimental phase or improvements in our various ranges due to market needs and/or demands.
- We have a technical-commercial team at your disposal that can advise you with regard to any doubts or queries

PACKAGING

FORMAT	5 l.	1 l.	750 ml.
UNIT/BOX	2	9	6
PALLETS	60 boxes	48 boxes	48 boxes



Internal code **RX521NF2552A20**



BAIXENS
baixens.com

*Testing the
difference*

BAIXENS ESPAÑA
POL. IND. MONCARRA, S/N
46230 ALGINET (VALENCIA)
T.: 961.750.834
F.: 961.752.471

BAIXENS FRANCE
14, RUE DU PONT NEUF
75001 PARIS (FRANCE)
T.: 0.800.90.14.37
F.: 0.800.90.20.52

BAIXENS ITALIA / BULOVA
VIA PIETRO NENNI, 36
46019 CICOGNARA - MANTOVA (ITALY)
T.: 0375/88181/790016 F.: 0375/88831
www.bulova-pennelli.com

BAIXENS PORTUGAL / ARGATINTAS
AVENIDA PORTAS DO MINHO, Nº 711
4760 - 706 RIBEIRÃO,
V.N. FAMILIÇÃO
T.: 252 910 030
www.argatintas.pt